


# DOUBLE FLANGED BUTTERFLY VALVE F 012-K1



Double flanged butterfly valve with short construction length to be used in heavy duty applications.

## TECHNICAL DATA


Nominal diameter:	DN 150 – DN 1200 bigger sizes upon request
Face-to-face:	EN 558 Series 20 (DIN 3202 T3 K1) ISO 5752 Series 20 (DIN 3202 T3 K1) API 609 Table 1 NF E 29-305.1
Flange accommodation:	DIN 2501 PN 6/10/16 ANSI B 16.5, Class 150 MSS SP44 Class 150 AWWA C 207 AS 2129 Table D and E BS 10 Table D and E JIS B 2211-5 K JIS B 2212-10 K
Flange Surface Design:	DIN 2526, Form A-E, ANSI RF
Top flange:	EN ISO 5211 NF E 29-402
Marking:	DIN EN 19
Tightness check:	DIN 3230 T3 BO, BN (Leakage Rate 1) ISO 5208, Category 3 API 598 Table 5 ANSI B 16-104, Class VI
Temperature range:	-20 °C to + 160 °C (depending on pressure, medium and material)
Operating pressure:	max. 16 bar
Differential pressure:	max. $\Delta p$ 16 bar
Vacuum:	0,2 bar absolute (depending on medium and temperature)

## FEATURES


- Absolutely tight sealing with flow in either direction
- The valve body and disc are accurately machined which results in low operating torque and long service life and reliability.
- Triple shaft bearings prevents shaft deflection and guarantees optimum guidance even after many years of operating service.
- Can be disassembled, material-specific recycling possible.
- Single flange mounting is possible.
- Can be installed in any desired position.
- Maintenance-free
- Fully repairable valve

## GENERAL APPLICATIONS

- Offshore
- Water and wastewater technology
- Shipbuilding
- Power plants



# DOUBLE FLANGED BUTTERFLY VALVE F 012-K1

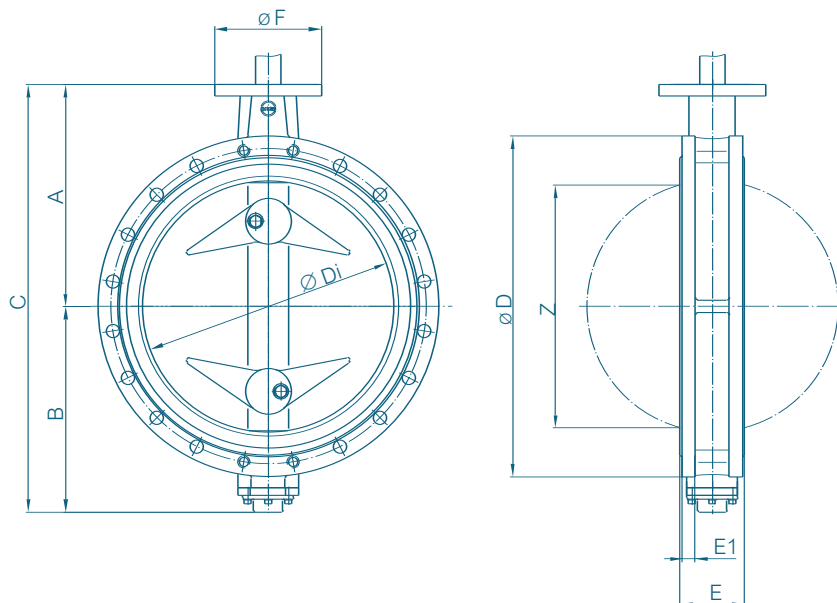

F012-K1 with free shaft end according to EN ISO 5211


DN [mm]	Size [in]	Dimensions [mm]									Weight [kg] GGG 40	
		A	B	C	D	Di	E	F	Flansch	Z	splitted shaft	TS- shaft
150	6	203	150	353	305	148	56	90	F 07	139	22	23
200	8	228	176	404	350	199	60	90	F 07	190	32	34
250	10	266	212	478	430	248	68	125	F 10	240	47	50
300	12	291	237	528	480	296	78	125	F 10	287	69	72
350	14	332	269	601	540	338	92	150	F 12	330	80	86
400	16	363	314	677	605	388	102	150	F 12	378	120	128
450	18	397	335	732	675	430	114	210	F 16	417	144	150
500	20	437	405	842	710	494,5	127	210	F14/F 16	474	163	170
600	24	498	469	967	830	590	154	300	F16/F 25	563	233	260
700	28	581	507	1088	905	680	165	300	F16/F 25	660	292	345
800	32	630	556	1186	1020	780	190	300	F 25	757	446	466
900	36	696	617	1313	1120	880	203	300	F 25	860	568	610
1000	40	771	675	1446	1250	980	216	350	F 30	956	624	722
1200	48	905	810	1715	1480	1170	254	350	F 30	1154	–	980

Subject to change without notice.

# ACTUATORS TYP F 012-K1


## HAND LEVER

DN [mm]	Size [in]	Hand Lever	F	H	L	Weight [kg]
150-200	6-8	Size III	90	100	276	0,50

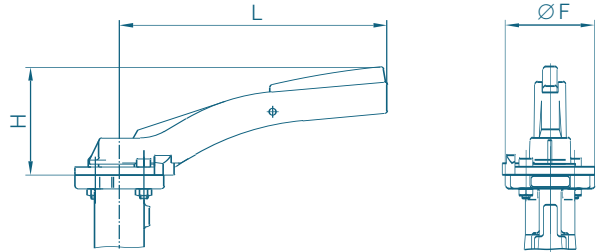

## WORM GEAR

DN [mm]	Size [in]	Gear	H	J	K	L	Weight [kg]
150-200	6-8	Size III	129	47	200	202	2,3
250	10	Size IV	129	60	200	252	2,8
300-350	12-14	Size V	158	76	250	280	6,3
400-450	16-18	Size VI	228	90	356	322	16,0
500	20	Size VII	278	123	457	406	30,5
550-600	22-24	Size VIII	355	154	610	466	45,0
700-800	28-32	Size XIV	295	54	457	466	65,0
900	36	Size XV	294	97	457	498	104,0
1000	40	Size XVI	253	237	356	558	186,0
1200	48	Size XVII	323	292	457	647	262,0

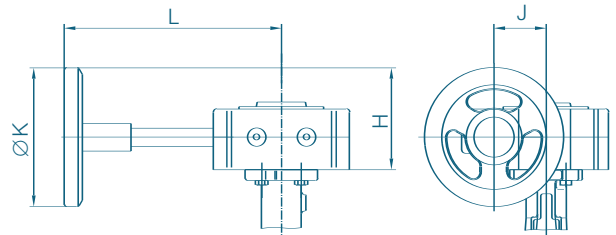


The dimensioning of actuators refers to an operating pressure of 10 bar.

## ELECTRIC ACTUATOR

DN [mm]	Size [in]	Weight [kg]	H	J	K	L	M	Weight [kg]
150	2-6	E 65	233	172	80	139	119	7,0
200-250	8-10	E 110	251	245	125	139	134	14,0
300-350	12-14	E 160	239	279	198	139	157	25,0
400-500	16-20	E 210	276	369	315	139	215	40,0

The dimensioning of actuators refers to an operating pressure of 10 bar.

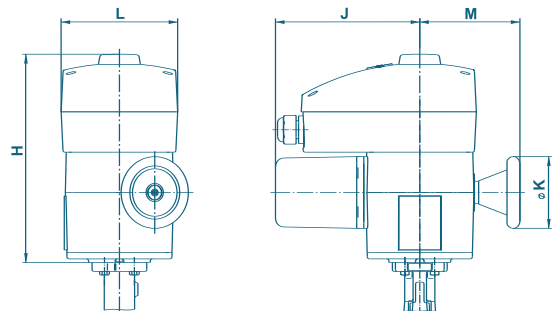

Other Actuators: See Documentation of the Manufacturer.

Subject to change without notice.

# ACTUATORS TYP F 012-K1

## PNEUMATIC DOUBLE ACTING

DN [mm]	Size [in]	Actuator Type	H	J	K	L	Weight [kg]
150	6	EB6	123	103	62	208	2,6
200	8	EB8	136	115	68	250	4,3
250-300	10-12	EB10	155	135	79	312	6,8
350-450	14-18	EB12	182	159	94	367	12,0
500	20	EB265	232	152	76	390	18,0
600-700	24-28	EB270	278	220	110	445	32,0
800-900	32-36	EB280	278	220	110	600	42,0

The dimensioning of actuators refers to the following operating conditions:


Control air Pressure: 6 bar

Operating Pressure: DN 150 - DN 300 10 bar

DN 350 6 bar

DN 400 - DN 900 3 bar

Dimensioning for other conditions: upon request

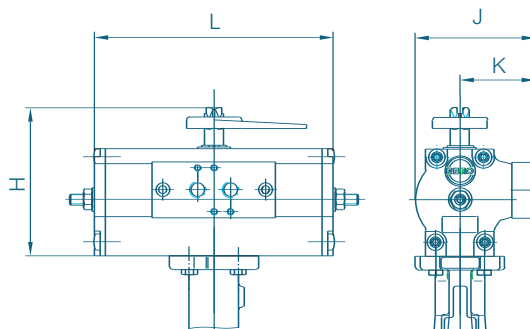

## PNEUMATIC SPRING RETURN

DN [mm]	Size [in]	EBF Actuator	H	J	K	L	Weight [kg]
150	6	EB8	136	115	68	389	7,7
200	8	EB10	155	135	79	526	14,3
250-300	10-12	EB12	182	159	94	658	25,4
350-400	14-16	EB270	278	220	110	655	45,0
450-600	18-24	EB280	278	220	110	1020	68,0

The dimensioning of actuators refers to the following operating conditions:


Control air Pressure: 6 bar

Operating Pressure: DN 150 - DN 300 10 bar

DN 350 6 bar

DN 400 - DN 900 3 bar


Dimensioning for other conditions: upon request

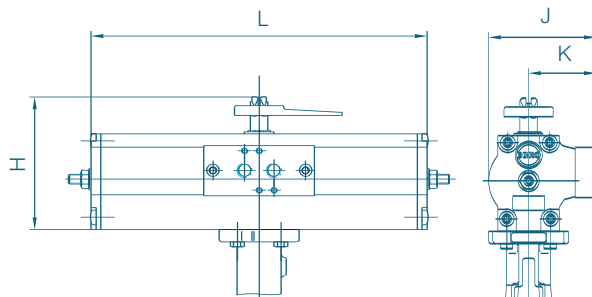

## SWITCH BOX SERIES MSK/NSK

MSK: Switch Box with integrated micro limit switches.

NSK: Switch Box with integrated proximity switches.

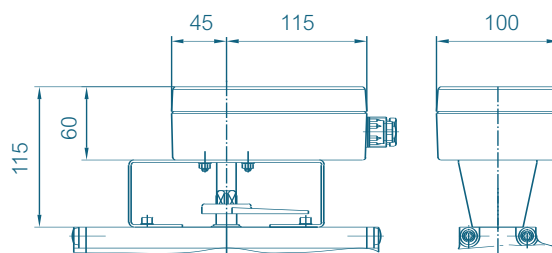


Other Actuators: See Documentation of the Manufacturer.

Subject to change without notice.

# DOUBLE FLANGED BUTTERFLY VALVE F 012-K1

## MATERIAL SPECIFICATION AND PARTS LIST

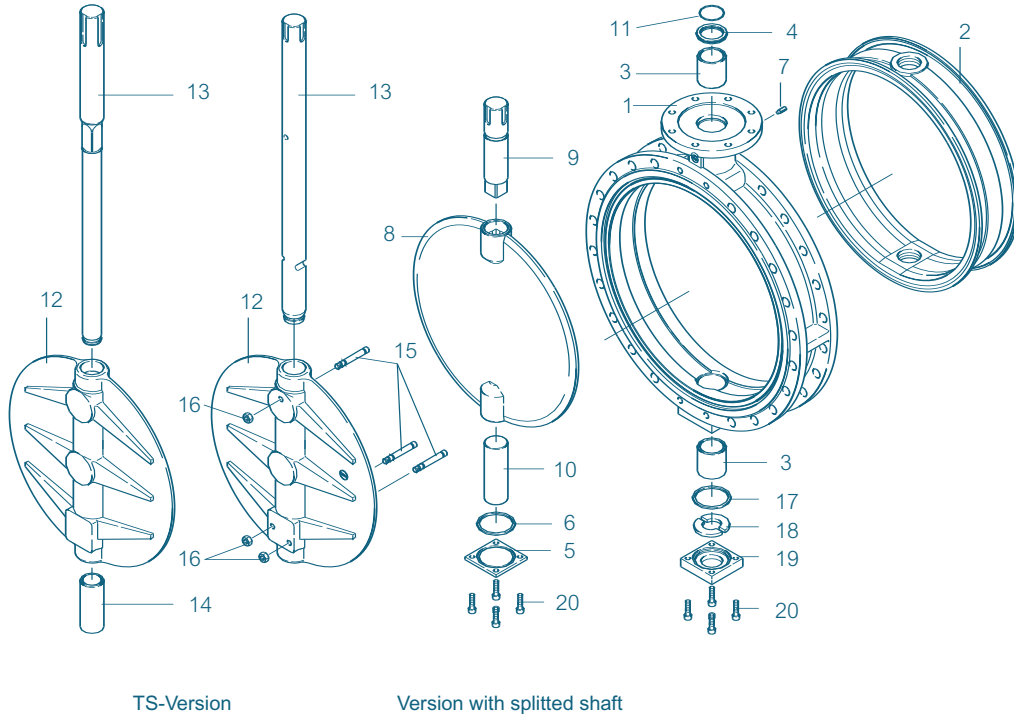

TS-Version

Version with splitted shaft

Pt.	Description	Material	Material No.	ASTM	Pt.	Description	Material	Material No.	ASTM
1	<b>Body</b>				9/10	<b>Shaft</b>			
	Nodular Cast Iron	GGG-40	0.7040	60-40-18			Stainless Steel	X14CrMoS17	1.4104
2	<b>Seal</b>							X5CrNiMo17-12-2	1.4401
	NBR	Acrylonitrile butadiene rubber						Hastelloy	2.4883
	EPDM	Ethylene propylene caoutchouc					Bronze	CuAlNiBZ	2.0975
	CSM	Chlorosulphonated polyethylene			11	<b>O-ring</b>			
	FPM	Fluorocarbon caoutchouc					NBR	Acrylonitrile butadiene rubber	
	VSI	Silicon rubber					FPM	Fluorocarbon caoutchouc	
3/4	<b>Bearing sleeve</b>				12	<b>TS-disc</b>			
	Bronze	RG 5					Nodular Cast Iron	GGG 40	0.7040
	Polyamide						Stainless Steel	G-X5CrNiMo19-11-2	1.4408
	PTFE						Aluminium Bronze	CuAl10Ni	2.0975
5	<b>Cover plate</b>						Coating	Halar, Rilsan	
	Grey Cast Iron	GG 25	0.6025	40 B			Surface		
6	<b>O-ring</b>						Quality	electropolished, mirror finished	
	NBR	Acrylonitrile butadiene rubber			13	<b>TS-shaft</b>			
	FPM	Fluorocarbon caoutchouc					Stainless Steel	X14CrMoS17	1.4104
7	<b>Set screw DIN 915</b>							X39CrMo17-1	1.4122
	Steel	45 H galvanized						X5CrNiMo17-12-2	1.4401
	Stainless Steel	X5CrNiMo 17-12-2	1.4401	B8M			Bronze	CuAlNiBZ	2.0975
8	<b>Disc</b>				14	<b>Sleeve</b>			
	Steel	St52.3	1.0570	572-50			Stainless Steel	X5CrNi18-10	1.4301
	Stainless Steel	X5CrNi 18-10	1.4301	304	15	<b>Taper Pin</b>			
		G-X5CrNiMo19-11-2	1.4408	A 351 CF8M			Stainless Steel	X6CrNiMoTi17-12-2	1.4571
		X2CrNiMo17-12-2	1.4404	316 I	16	<b>Hex. Nut</b>			
		X2CrNiMoTi17-12-2	1.4571	316 Ti			Stainless Steel	A2	8
		X2CrNiMoN22-5-3	1.4462	F 51	17	<b>O-ring</b>			
		Hastelloy	2.4883	Hastelloy			NBR	Acrylonitrile butadiene rubber	
	Aluminium Bronze	CuAl10Ni	2.0975	C 95800	18	<b>Shaft retainer</b>			
	Coating	Halar, Rilsan					Bronze	RG 5	B45
	Surface				19	<b>Cover plate</b>			
	Quality	electropolished, mirror finished					Grey Cast Iron	GG 25	0.6025
					20	<b>Screw</b>			
							Steel	45 H galvanized	
							Stainless Steel	A2-70	B8
	Other materials upon request.							A4-70	B8M

Subject to change without notice.

# DOUBLE FLANGED BUTTERFLY VALVE F 012-K1

## TORQUE

- The torque values specified (MD) are based on liquid and lubricant media.
  - Powdery (non-lubricant) media  
Md x 1,3
  - Dry gases/high viscous media  
Md x 1,2
  - The values specified are based on the initial breakaway torque.
  - Dynamic torque specification available upon request.
- Regarding the dimensioning of actuators, please contact our engineers.

DN [mm]	Size [in]	Operating Pressure			
		3 [bar]	6 [bar]	10 [bar]	16 [bar]
150	6	36	45	110	125
200	8	59	76	140	200
250	10	150	180	200	240
300	12	200	240	280	360
350	14	350	540	610	700
400	16	420	620	750	850
450	18	720	746	860	1500
500	20	900	1100	2255	3690
600	24	1050	2100	3000	5830
700	28	1560	2240	3450	8100
800	32	2070	3800	6600	11 200
900	36	2700	4900	7100	14 500
1000	40	4600	6780	11 500	24 400
1200	48	7800	12 000	21 000	44 000

Alle Angaben in Nm

## K<sub>V</sub>-VALUES

- The K<sub>V</sub>-value (m<sup>3</sup>per hour) is the flow of water at a temperature of 5 °C to 30 °C ( 41 °F to 86 °F) at Δp of 1 bar.
  - The K<sub>V</sub>-values specified are based on tests carried out by the Delfter Hydraulics Laboratories, the Netherlands.
  - Permissible velocity of flow  
V<sub>max</sub> 4,5 m/s for liquids and  
V<sub>max</sub> 70 m/s for gases.
  - The throttle function is linear at an angle 30° to 70°.
  - Avoid cavitation!
- For further values, please contact our engineers.

DN [mm]	Size [in]	Opening angel α°							
		20°	30°	40°	50°	60°	70°	80°	90°
150	6	35	90	200	360	640	900	1350	2100
200	8	43	180	350	580	1000	1600	3000	4000
250	10	125	360	660	1100	1800	3100	5300	6400
300	12	200	550	1000	1600	2600	5000	7500	8500
350	14	350	780	1400	2400	4000	8000	10 800	11 500
400	16	490	1050	1800	3100	5500	11 000	12 000	14 500
450	18	510	1080	2040	3350	6100	11 500	14 600	20 500
500	20	520	1100	2200	3500	6200	12 000	15 100	21 000
600	24	750	1400	2800	5100	8800	14 000	22 000	29 300
700	28	770	1755	3260	5980	10 600	17 100	25 300	36 000
800	32	1200	2260	4550	8230	12 900	20 300	29 300	44 600
900	36	1540	2280	6030	10 500	17 600	29 200	42 150	59 000
1000	40	2200	3970	8300	14 480	24 000	37 100	60 300	81 500
1200	48	5050	7900	13 800	19 700	33 500	53 300	73 050	102 650

Subject to change without notice.